

EcoGreen Technologies (S) Pte Ltd

1. HEAT PIPE

STANDARD COPPER/ ALUMINIUM HEATPIPE DIAMETER:


3.0mm, 4.0mm, 6.0mm and 8mm



Thermal Performance (Q-max of Heat Pipe by L=150mm)

Final Forming Thickness	Pipe Diameter (Q-max deviation: $\pm 10\%$)				
	ϕ 3 mm	ϕ 4 mm	ϕ 5 mm	ϕ 6 mm	ϕ 8 mm
T = 2.0mm	9 W	16 W	20 W	28 W	31 W
T = 2.5mm	13 W	17 W	31 W	45 W	62 W
T = 3.0mm	14 W	17 W	41 W	55 W	71 W
Round	14 W	17 W	45 W	57 W	84 W

(Std deviation: $\pm 10\%$)

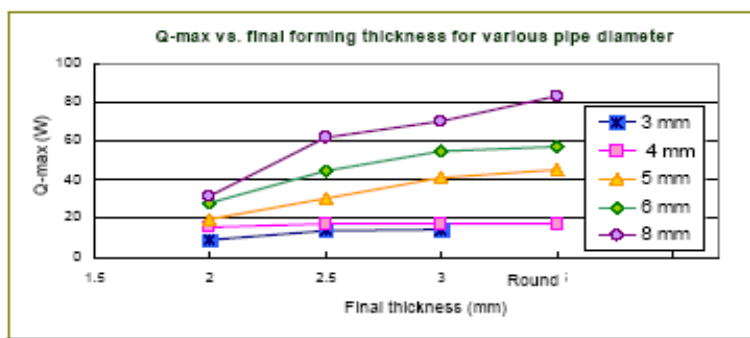

* All are customised to customer specifications.

2. OTHER TYPE OF HEATPIPE FOR SPECIFIC APPLICATION. (Contact our Sales for Details)